



MINI-STACKLIGHT AXM-UP2000-L000

FEATURES

- 90 dB Buzzer
- 360° viewing angle
- Distinct colour separation
- Light weight compact design
- Solid State LED lights

MECHANICAL



- Standard 5pin MINI connector (male)
(Brad Harrison 1A5002-34 type)
- 7/8" -16UN internal threading
- Solid connection – no detachable components*
- IP61 construction
- Mates with Mencom MIN-5FR series
or BH equivalent
- Length = 8.38" (202.6mm)
Ø (buzzer) = 1.74" (44.2mm)
Ø (shaft) = 1.25" (32mm)

****Assembly does not come apart, NO user serviceable or modifiable parts inside***

PIN DESCRIPTION			
Pin	Description	Nominal Voltage	Maximum Voltage
1	Common	-	-
2	Buzzer	24V	30V
3	Green Light	24V	30V
4	Yellow Light	24V	30V
5	Red Light	24V	30V

**apply operational voltage to respective pin to activate buzzer or lights*

ORDERING INFORMATION	
Part #	Description
AXM-UP2000-L000	Mini Integrated Stacklight (32mm)

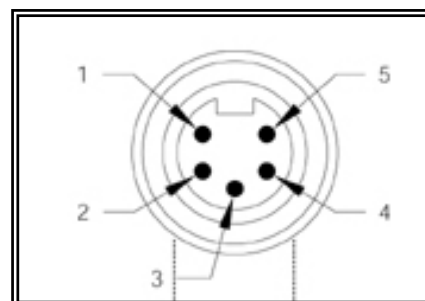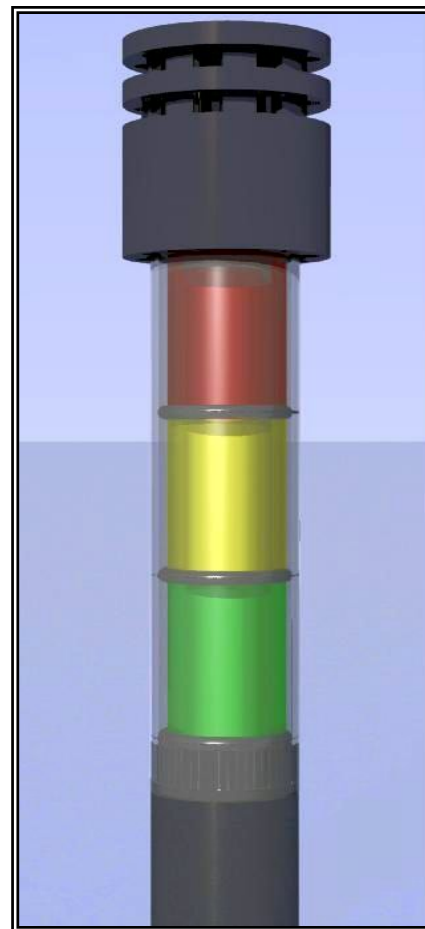

Bottom view (male connector)

