



MINI-STACKLIGHT AXM-UP2000-L100


FEATURES

- 80 dB Buzzer (solid and beeping feature)
- 360° viewing angle
- 5 Distinct color separations
- Light weight compact design
- Solid State LED lights
- The unit has several connection options
 - o 8pin Micro connector
 - o 8pin MD12 with 6' cabled
 - o Short leaded low cost Molex


MECHANICAL

- Standard 8pin MICRO connector (male MD12)
- Solid connection – no detachable components*
- IP61 construction
- Length = 11" (279mm)
 $\varnothing$ (buzzer) = 1.74" (44.2mm)
 $\varnothing$ (shaft) = 1.25" (32mm)

**Assembly does not come apart, NO user serviceable or modifiable parts inside*

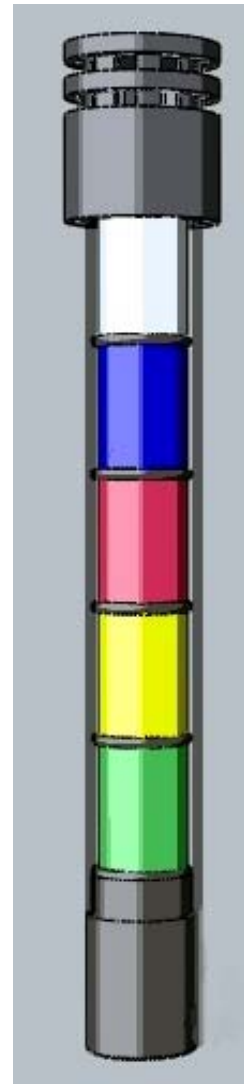

PIN DESCRIPTION			
Pin	Description	Nominal Voltage	Maximum Voltage
1	Common	-	-
2	Green Light	24V	30V
3	Amber Light	24V	30V
4	Red Light	24V	30V
5	Blue Light	24V	30V
6	White Light	24V	30V
7	Buzzer (solid)	24V	30V
8	Buzzer (beep)	24V	30V
apply operational voltage to respective pin to activate buzzer or lights			

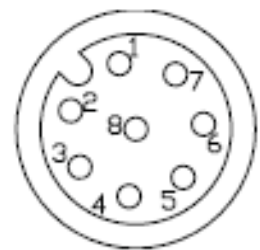

Bottom view (male connector)

ORDERING INFORMATION	
Part #	Description
AXM-UP2000-L100	5 Color Mini Stack Light with Integrated Connector (8pin micro)
AXM-UP2000-L101	5 Color Mini Stack Light with Integrated Connector (8pin .100 Molex header)
AXM-UP2000-L102	5 Color Mini Stack Light with Integrated Cable (8pin micro)
AXM-UP2000-L103	5 Color Mini Stack Light with 1/2" liquid tight connector